

# Garage Door and Entrance Gate Operators

Compatible operator solutions from Europe's no.1







Hörmann brand quality	4
Hörmann BiSecur radio system	6
Garage door operator quality features	10
Garage door operator SupraMatic	12
Garage door operator ProMatic	14
Automatic door locking	16
Entrance gate operator quality features	18
Hinged gate operator RotaMatic	20
Hinged gate operator DTU 250	22
Hinged gate operator DTH 700	23
Sliding gate operator LineaMatic	24
Sliding gate operator STA 400	25
Accessories	26
Dimensions and fitting data	38
Programme overview	47


Some of the doors shown are equipped with optional extras and do not always correspond to our standard models.

The surface finishes and colours shown are subject to the limitations of the printing process and cannot be regarded as binding.

All rights reserved. No part may be reproduced without our prior permission. Subject to changes.

# Hörmann brand quality

#### Reliable and oriented towards the future

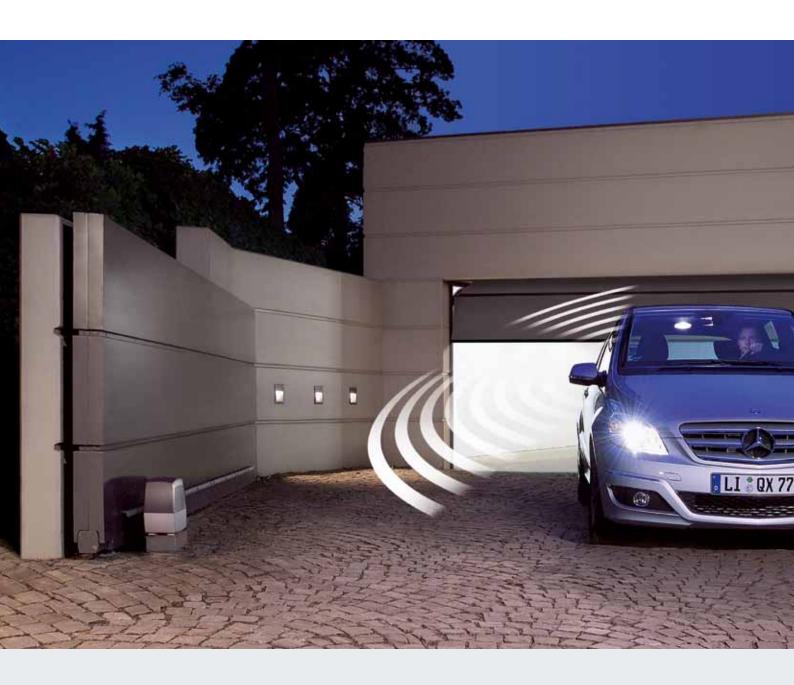

### "A good reputation must be earned." (August Hörmann)

In line with the founder's philosophy, the Hörmann brand today is a true promise of quality. The family-owned company has over 75 years of experience in door and operator construction and, with sales of over 20 million doors, is no. 1 in Europe. This makes a Hörmann operator a reassuring purchase.





#### **Brand quality "Made in Germany"**

All doors and operator components developed and manufactured by Hörmann are perfectly matched to each other and tested and certified by independent, recognised institutes to ensure your safety. They are manufactured in Germany according to the DIN ISO 9001 quality management system and meet the requirements of European standard 13241-1. Furthermore, our highly qualified employees work intensively on new products, continual further developments and improvements to details. The results are patents and one-of-a-kind products you can depend on.



#### **Door operators for generations**

Endurance tests under real-life conditions ensure mature series products with Hörmann quality. Thanks to this, as well as excellent technical solutions and uncompromising quality assurance, you receive a 5-year warranty on all Hörmann garage door and entrance gate operators.\*



#### An eye on the future

Hörmann is setting a good example. This is why, since 2013, the company has obtained 40 % of its required energy from green sources and will continue to increase this percentage. At the same time, many tonnes of  $\rm CO_2$  are saved each year thanks to the introduction of an intelligent and certified energy management system. And last but not least, Hörmann offers products for sustainable construction.

Find out more about Hörmann's environmental activities in the "We think green" brochure.

<sup>\*</sup> The complete warranty conditions can be found at: www.hoermann.com

### Hörmann BiSecur

The modern radio system for garage door and entrance gate operators





#### Convenient and safe with bi-directional radio technology

Our bi-directional, high-security BiSecur radio system is based on future-oriented technology that allows you to conveniently and safely operate garage doors, entrance gates, lights and much more. Functions are operated using exclusive hand transmitters. Querying the door position is an especially convenient feature: you can see if your door is open or closed at the press of a button.





# Certified security with a stable and interference-free range

The newly developed, extremely secure BiSecur encryption protocol makes sure that no-one can copy your radio signal. It was tested and certified by security experts at Bochum University.

#### 128-bit encryption

Benefit from the same high security level as in online banking.



# Innovative technology in an elegant package

The new, exclusive BiSecur hand transmitters are set apart by a black or white high-gloss surface in a piano lacquer look or a black textured surface, as well as an elegant shape that fits easily in the palm of your hand. Chrome caps create accents, completing the high-quality look.

Hörmann's BiSecur hand transmitters with optional high-gloss surface have been awarded a design prize by an international jury.



A complete overview of BiSecur hand transmitters can be found starting on page 26.

# **Convenient querying of the door position**

Convenient and safe with bi-directional radio technology





You no longer have to go out in all kinds of weather to check that your garage door is closed. At the press of a button, the colour of the LED on the HS 5 BS hand transmitter indicates the position of the door. If required, another push of a button\* closes the door.


<sup>\*</sup> An additional photocell is required for operation without visual contact to the door.








# Querying the door position To check whether the door is closed, press the query button on the HS 5 BS and then press the function button to open the door. The LED is illuminated in orange.



**Door position reporting**The LED will flash in red if the door is still open. A closed door is indicated by a green LED.



Convenient closing
You can close your door
by pressing the function button
once more.
Note: An additional photocell

Note: An additional photocell is required if the door is not within view.



**Automatic door position reporting** The green LED then indicates that your door is closed.

# With the HS 5 BS hand transmitter, you can check whether your door is closed at the press of a button.

- As standard with garage door operator SupraMatic
- Optional for garage door operator ProMatic
- As standard for entrance gate operators RotaMatic and LineaMatic





### BiSecur smartphone app // NEW

- To operate Hörmann operators, entrance doors and other devices: smart, at any time and worldwide
- Display the door position of your garage door and entrance gate operators
- Display the locking state of your entrance door\*\*




For further information, see the BiSecur Gateway brochure.

\*\* With special equipment

### **Good reasons to try Hörmann**

Garage door operator quality features





#### Anti-lift kit

Burglars have a tough time when it comes to Hörmann automatic garage doors: When the garage door is closed, the anti-lift kit automatically engages in the guide rail stop, immediately locking and securing it against forced opening. This lock is purely mechanical and, in contrast to operators from other manufacturers, effective even in the event of a power failure.




#### **Automatic safety cut-out**

The reliable automatic safety cut-out securely stops the door if it encounters an obstacle. For even more protection and safety, we recommend fitting a non-contact photocell. This is a standard feature in the Hörmann SupraMatic P operator.

#### Soft start and soft stop

Your door opens and closes quietly and smoothly. The start and stop phases can be individually set for your garage door. This protects your garage door, allowing you to enjoy it for years to come.

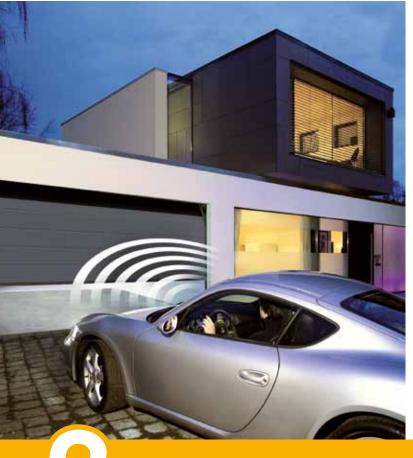



Super-fast

# **Certified**

#### SupraMatic operator

You can enter faster and more safely with the SupraMatic operator when combined with a Hörmann sectional garage door. An opening speed up to 50 % faster means more safety and less stress on high-traffic streets. Compare the opening speed of the SupraMatic operator with conventional operators.



Take a look at the video at: www.hoermann.com/en/videos



#### **Tested safety**

Hörmann garage door operators are perfectly matched to the sectional garage doors and have been tested and certified by TÜV Nord in accordance with the TTZ directive "Break-in resistance for garage doors".

### **Garage door operator SupraMatic**

The supra-fast operator with many additional functions.





This combination of speed and convenience is fascinating. Your sectional garage door opens faster and you can drive directly from the street into your garage. The SupraMatic has many added functions, such as being able to switch the lighting on and off with your hand transmitter, and the convenient option of an additional opening height to ventilate your garage. An operator cover made of brushed aluminium also provides the SupraMatic with a very elegant appearance.

# Low power consumption costing only around £3 per year\*\*



# Convenient querying of the door position

You can use the standard HS 5 BS hand transmitter at any time to check that your garage door is closed.



#### **Faster door opening**

An up to 50 % faster opening speed gets you from the street into your garage sooner.



#### **Additional opening setting**

With an adjustable opening option, you can ventilate your garage without completely opening the door.



# Halogen lighting can be switched on / off separately

The operator lighting can be switched on and off separately via your hand transmitter or the IT 3b optional internal push-button unit.

Optionally available as an LED reflector lamp.



#### **Easy-to-use programming**

All of the operator functions can be set very easily by entering a two-digit number.



#### **High security**

The standard EL 101 photocell for the SupraMatic P immediately detects persons and objects. Families with children especially appreciate this level of safety.

#### SupraMatic E

Pull and push force: 650 N

Peak force: 800 N

Opening speed: max. 22 cm/s Door width: up to 5500 mm (max. 13.75 m² door surface)

#### SupraMatic P

Incl. photocell

Pull and push force: 750 N

Peak force: 1000 N

Opening speed: max. 22 cm/s Door width: up to 6000 mm (max. 15 m² door surface) For heavy timber doors and doors with wicket doors

#### SupraMatic HT // NEW

For collective and underground garages.
Your Hörmann partner will be pleased to advise you further.

<sup>\*</sup> The complete warranty conditions can be found at: www.hormann.co.uk

<sup>\*</sup> With 5 door cycles per day and an electricity price of 0.25 euros/kWh

# **Garage door operator ProMatic / ProMatic Akku**

Reliable function at an attractive price





ProMatic garage door operators feature the same proven Hörmann technology as all Hörmann premium operators. This guarantees reliable function – at an attractive price.

Even in a garage without a mains connection, you can enjoy the comfort and convenience of an operator. The ProMatic Akku makes it possible. Easy to transport, it can be recharged in a matter of hours, or conveniently via the optional solar module.



# Optional querying of the door position

You can use the optional HS 5 BS hand transmitter at any time to check that your garage door is closed (not for ProMatic Akku).



#### Additional opening setting

With the individually adjustable second opening height, you can ventilate your garage without completely opening the door (not for ProMatic Akku).




#### ProMatic Akku

A convenient solution for garages without a power connection. Similar to the recharging of a mobile phone, the battery is simply connected to a power outlet using the supplied charger.



#### Easy overnight recharging

A practical carrying handle and its light weight make it easy to transport the battery for charging. The solar module makes charging even more convenient.



#### Solar module (optional)

A practical extension to ProMatic Akku takes over battery charging.

Delivery includes fitting material, 10 m connecting lead and charge controller, dimensions:  $330 \times 580 \text{ mm}$ 

#### **ProMatic**

Pull and push force: 600 N

Peak force: 750 N

Opening speed: max. 14 cm/s Door width: up to 5000 mm (max. 11 m² door surface)

#### **ProMatic Akku**

For garages without power connection. With 868 MHz fixed code (without door position query) Pull and push force: 350 N

Peak force: 400 N

Opening speed: max. 13 cm/s Door width: up to 3000 mm (max. 8 m² door surface)

#### **Battery**

Operation period: approx. 40 days\*\* Charging time: 5 – 10 hours\*\*\*

Weight: 8.8 kg

Dimensions: 330 × 220 × 115 mm

<sup>\*</sup> The complete warranty conditions can be found at: www.hormann.co.uk

<sup>\*\*</sup> Based on an average of 4 door cycles per day and an ambient temperature of 20° Celsius

<sup>\*\*\*</sup> Depending on the charging state

### The Hörmann operator boom

Security both day and night with automatic locking





### **Only from Hörmann**

# Automatic door locking in the operator boom

When the garage door is closed, the anti-lift kit [1] automatically engages in the operator boom's stop. The door locks immediately and is secured against forced opening. This process is purely mechanical and thus also functions without a power supply!





#### **Exceptionally flat boom**

An exceptionally flat boom [2] – only 30 mm high – means that operators are easy to fit to any commercially available garage door and are therefore also ideal for retrofitting.

#### **Emergency release from inside**

To conveniently open the door from the inside in the event of a power failure [3].

#### **Universal fitting bracket**

The universal fitting bracket [4] fits all commercially available up-and-over and sectional doors.


#### Maintenance-free toothed belt

Reinforced with aramid fibres, the Kevlar toothed belt [5] is particularly tear-resistant and quiet-running. It does not require grease or lubricants, providing an important advantage over chain or spindle operators.

#### **Automatic belt tension**

A strong spring mechanism [6] tensions the toothed belt automatically, thus ensuring uniform, smooth running.

#### As standard with all Hörmann garage door operators

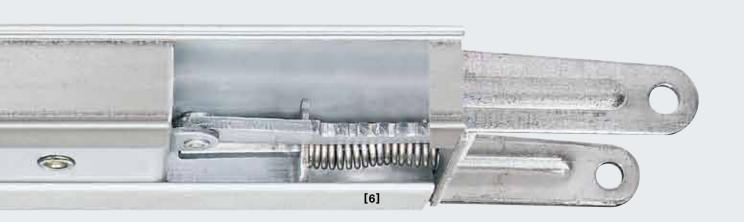

#### **Compact unit**

Hörmann's doors, operators and booms form a compact, permanently connected unit. Additional control units and exposed, movable connecting leads are not necessary.

#### Simple installation

Hörmann operators can be installed easily and quickly. Operator booms can be fastened individually thanks to variable suspensions: either to the ceiling or directly to the reinforced connection profile on the Hörmann sectional door (up to 3000 mm door width). An additional advantage: just one suspension is sufficient, even for long booms.

#### **Centre installation**

Centre installation of the operator rails on the door leaf results in uniform pull forces. No canting, no wear, which is frequently the case with e.g. operators installed on one side.



#### Simple installation

For Hörmann sectional doors with a width up to 3000 mm, the operator boom can be fitted on the door connection profile.



**Special track application for hinged garage doors**Thanks to simple assembly of the optional track application, retrofitting is also very easy.

# **Good reasons to try Hörmann**

#### **Entrance gate operator quality features**



#### **Automatic safety cut-out**

Hörmann entrance gate operators work reliably during all opening and closing phases. The gate stops immediately if it encounters an obstacle. Non-contact photocells detect persons or objects, providing additional safety. They can be easily integrated in our elegant safety key switch posts (see page 37) and placed near the entrance to monitor the area of travel of your hinged or sliding gate.

#### Soft start and soft stop

Hörmann entrance gate operators open quietly and reliably. The gate opens without a jolt and gently brakes before fully closing. This protects the gate and operator and does not disturb your neighbours.



Zertifikat

Language

Gamen Samen Sa

Robust

# **Certified**

#### Top quality

High-quality entrance gate operators from Hörmann are decidedly robust, ensuring that they can remain in good mechanical condition over the long run. Weather-resistant and lasting material ensures long-term function. Our RotaMatic version also comes with integral heating for use in especially cold regions.

#### **Tested safety**

Hörmann entrance gate operators work safely during all opening and closing phases. The operating forces for common door sizes and fitting situations have been tested and certified by TÜV in accordance with DIN EN 13241-1.

# Hinged gate operator RotaMatic / RotaMatic Akku

A streamlined operator with an elegant appearance





Thanks to its modern, slimline design, Hörmann's RotaMatic hinged gate operator is the perfect partner for your beautiful hinged gate. Just like the design, the functional and safety features are also exemplary. The RotaMatic Akku makes it possible to enjoy the convenience of an operator, even if there is no direct connection to the mains supply.



# Convenient querying of the door position


With the standard hand transmitter HS 5 BS, you can check if your entrance gate is closed at any time (not for RotaMatic Akku).



#### RotaMatic Akku

e.g. overnight.

Entrance gates without a power connection can be operated with the RotaMatic Akku.
Its battery is easy to transport and can be charged in a matter of hours.



#### Solar module (optional)

An optional solar module makes the system completely independent of the mains supply.

Delivery includes fitting material, 10 m connecting lead and charge controller. Dimensions: 330 × 580 mm



# Sound-absorbing seal (optional)

The operating forces for many door sizes and fitting situations using RotaMatic operators with optional sound-absorbing seal have been tested and certified by TÜV.



#### **Electric lock (optional)**

Hinged gates are subjected to enormous forces under high wind loads. An additional electric lock secures them from being blown open.

#### **RotaMatic**

Gate leaf width: max. 2500 mm Gate leaf height: max. 2000 mm Weight: max. 220 kg

#### RotaMatic P

Gate leaf width: max. 2500 mm Gate leaf height: max. 2000 mm Weight: max. 400 kg

#### RotaMatic PL

Gate leaf width: max. 4000 mm Gate leaf height: max. 2000 mm Weight: max. 400 kg

#### RotaMatic Akku

With 868 MHz fixed code (without door position query) Gate leaf width: max. 2500 mm Gate leaf height: max. 2000 mm Weight: max. 120 kg

#### **Battery**

Integrated in a lockable control cabinet Operation period: approx. 30 days\*\* Charging time: 5 – 10 hours\*\*\* Weight: 8.8 kg

Dimensions: 320 × 220 × 115 mm

- The complete warranty conditions can be found at: www.hormann.co.uk
- \*\* Based on an average of 4 door cycles per day and an ambient temperature of 20° Celsius
- \*\*\* Depending on the charging state

#### **Optional accessories**

- Electric lock (recommended from a leaf width of 1500 mm)
- Sound-absorbing seal
- Emergency battery HNA
- SK set (one-way photocell and traffic light)
- HSK 3 lockable emergency release
- Integral heating for colder regions (down to 35°C)
- Track variants for special fitting situations

# **Underground hinged gate operator DTU 250**

An almost invisible operator for attractive gates



The underground operator DTU 250 is an almost invisible and space-saving solution for use in private areas. We recommend floor fitting to create especially elegant gates.



#### **DTU 250**

Gate leaf width: max. 2500 mm Gate leaf height: max. 2500 mm Weight: max. 500 kg

A radio unit must be ordered separately for this operator. Technical clarification is also required. Please contact your Hörmann dealer.

# **Hinged gate operator DTH 700**

An especially robust and powerful operator



#### **DTH 700**

Gate leaf weight: max. 7000 mm Gate leaf height: max. 2500 mm Weight: max. 1000 kg

A radio unit must be ordered separately for this operator. Technical clarification is also required. Please contact your Hörmann dealer.

### Sliding gate operator LineaMatic

A compact and reliable operator





#### LineaMatic

Gate leaf width: max. 6000 mm Gate leaf height: max. 2000 mm Weight: max. 300 kg Self-supporting: max. 250 kg

#### LineaMatic P


Gate leaf width: max. 8000 mm Gate leaf height: max. 2000 mm Weight: max. 500 kg Self-supporting: max. 400 kg

#### LineaMatic H

Gate leaf width: max. 10000 mm Gate leaf height: max. 3000 mm Weight: max. 800 kg Self-supporting: max. 600 kg

A radio unit must be ordered separately for the operator LineaMatic H. Technical clarification is also required. Please contact your Hörmann dealer.

Highlights of the sliding gate operator LineaMatic include its compact, height-adjustable housing made of zinc diecast and glass-fibre reinforced plastic, as well as its reliable operator electronics.



# Convenient querying of the door position

You can use the standard HS 5 BS hand transmitter at any time to check that your entrance gate is closed.



As standard with hand transmitter HS 5 BS in black textured surface with chrome caps

# Sliding gate operator STA 400

### For large and heavy gates



The sliding gate operator STA 400 is specifically designed for large gates. The matching control B 460 FU ensures precise gate travel and smooth stopping.

#### **STA 400**

Gate leaf width: max. 17000 mm Gate leaf height: max. 3000 mm Weight: max. 2500 kg

Self-supporting: max. 1800 kg

A radio unit must be ordered separately for this operator. Technical clarification is also required. Please contact your Hörmann dealer.

# Innovative technology for your home

Intelligent accessories for more comfort



Operate your garage door and entrance gate easily, conveniently and comfortably. Our elegant hand transmitters let you open your gate from your car as easily as you would operate a TV. Or you can position a stationary control element directly in front of or in your garage. The BiSecur app lets you control your operators with your smartphone or tablet from your sofa or anywhere in the world via the Internet.



A beautiful way to control your gate operators. Hörmann's elegant hand transmitters combine function and design.



A fingerprint is all you need to open the door without the need to search for your key.



The Hörmann Gateway and BiSecur app let you easily control your operators from your sofa or anywhere in the world via the Internet.

# The modern radio system for garage door and entrance gate operators

#### Interference-resistant

Interference-resistant radio signal with a stable range

#### 128-bit encryption

Benefit from the same high security level as in online banking.

#### Impact-resistant

The hand transmitter is very sturdy thanks to a permanently installed antenna.

#### **Backwards** compatible

The new BiSecur control elements are also suitable for the operation of all Hörmann operators with a radio frequency of 868 MHz (year of manufacture 2003 – 06/2012). (Querying the door position is not possible).

#### Simple code transmission

Your individual hand transmitter coding can be easily transmitted to another hand transmitter.



Easy transmission of the radio code to other hand transmitters

### Mobile radio accessories

#### For every situation





# Hand transmitter HS 5 BS

4 button functions plus query button,

- [1] High-gloss black or white
- [2] Black textured surface **// NEW**



# Hand transmitter HS 4 BS

4 button functions, [3] high-gloss black

# Hand transmitter HS 1 BS

1 button function, [4] high-gloss black

# Hand transmitter HSE 1 BS / NEW

1 button function, incl. eyelet for key ring [5] High-gloss black



#### Hand transmitter HSE 2 BS

2 button functions incl. eyelet for key ring

[6] High-gloss black or white

[7] High-gloss green, purple, yellow, red, orange (figs. from left)

[8] Black textured surface with chrome or plastic caps **II NEW** 

[9] Decors in silver, carbon, light rootwood, light timber, dark timber, dark rootwood (figs. from left)









Hand transmitter
HSD 2-A BS
Aluminium look,
2 button functions,
can also be used as a key ring

HSD 2-C BS
High-gloss chrome,
2 button functions,
can also be used as a key ring



# Hand transmitter holder incl. visor clip

For wall fitting or fastening to the sun visor of your car, transparent, available in 2 versions for:
HS 5 BS, HS 4 BS, HS 1 BS and HSE 2 BS, HSE 1 BS



Hand transmitter HSP 4 BS 4 button functions, with button lock-out, incl. key ring





Hand transmitter HSZ 1 BS

1 button function, for insertion in vehicle cigarette lighter

**HSZ 2 BS**2 button functions,
for insertion in vehicle cigarette lighter



#### **HSZ** hand transmitter

The alternative to homelink systems: integrated in an inconspicuous spot in your car. Inserted in the vehicle's cigarette lighter, the HSZ hand transmitter is easily accessible and convenient to operate.







Radio code switch FCT 3 BS For 3 functions, with illuminated buttons



Radio finger-scan
FFL 12 BS
For 2 functions
and up to 12 fingerprints



Radio code switch FCT 10 BS For 10 functions, with illuminated buttons and protective cover



Radio internal push button FIT 2 For 2 operators or operator functions



With Hörmann, everything fits together. With just one hand transmitter you can open your garage door, as well as your Hörmann entrance gate operator.



#### Recessed radio transmitter

For two functions, in conjunction with a commercially available recessed switch, for central installation in a hallway/living room within sight of the garage door.

**HSU 2:** for all commercially available switch boxes with 55 mm Ø connection to the house mains supply **FUS 2:** incl. 9 V battery/connection option for voltages up to 24 V (not shown).

With 868 MHz fixed code



#### Receiver HER 1

A receiver (1, 2 or 4-channel) is needed to operate an additional external light or a garage door (of other make) using Hörmann radio accessories.



#### BiSecur Gateway\* / ■ NEW

A central control unit for your operators and radio receivers permits up to 10 users. In total, up to 16 functions can be carried out by each user.



#### Radio receiver ESE\* / NEW

With the radio receiver ESE and a SupraMatic operator\*\* you can specifically assign the commands "Open – Stop – Close" to individual buttons. Your garage door will then move directly in the desired direction.

- For further information, see the BiSecur Gateway brochure.
- SupraMatic from year of manufacture 2014, series version Cl
- \*\*\* With special equipment



#### Radio code switch

Open your garage easily by entering a personal code. No hand transmitter required!



# Hörmann Gateway and BiSecur app // NEW

With the app, you can conveniently control your Hörmann garage door or entrance gate operators, Hörmann entrance door and other devices using your smartphone or tablet. You can also display the door position for your garage door or entrance gate, as well as the locking state of your entrance door.\*\*\*

# **Stationary convenience**

#### **Accessories for outside**





CTR 1d/CTR 3d code switch For 1 or 3 functions with hinged protective cover




CTR 1b/CTR 3b code switch For 1 or 3 functions, with illuminated buttons and weather-resistant membrane keypad



CTV 1/CTV 3 code switch For 1 or 3 functions, especially robust, protected against vandalism.



FL 12/FL 100 finger-scan For 2 functions, to open the garage door via a fingerprint. Can store 12 or 100 fingerprints, respectively.



TTR 100/TTR 1000 transponder key switch For 1 function with 2 keys (more on request) for up to 12/100/1000 keys.



### Internal push button

IT 1

With impulse button to open and close the door (for ProMatic, SupraMatic and ProMatic Akku)



# Internal push button IT 1b

You can conveniently open the door by pushing the large, illuminated button on the IT 1b (for ProMatic and SupraMatic).



### Internal push button

Along with a large illuminated button for conveniently opening the door, the internal push button IT 3b has two additional buttons. These can be used to control the operator light and completely switch off the radiocontrol system for the operator, e.g. while you are away on holiday (for SupraMatic).



# Internal push button PB 3

With illuminated impulse button to open or close the door, button for garage light and button to switch off the radio system (for SupraMatic).



#### Key switch STUP 40 / STAP 40

In a recessed version and surface-mounted version, including 3 keys.



#### Key switch ESU 40 / ESA 40

In a recessed version and surface-mounted version, including 3 keys.



#### **Key switch post STS 1**

The key switch post STS is available with one or two adapters for command units (must be ordered separately). Transponder key switches, code switches, finger-scans or key switches can be installed. The post is White aluminium (RAL 9006), the cover and base are Slate grey (RAL 7015). Protected for outdoor use in accordance with IP 44.


Height: 1250 mm, base diameter: 300 mm.



The illustration shows a key switch post with fitted STUP 40 key switch (optional).

# **Everything for emergencies**

Innovative ideas for comfort and security

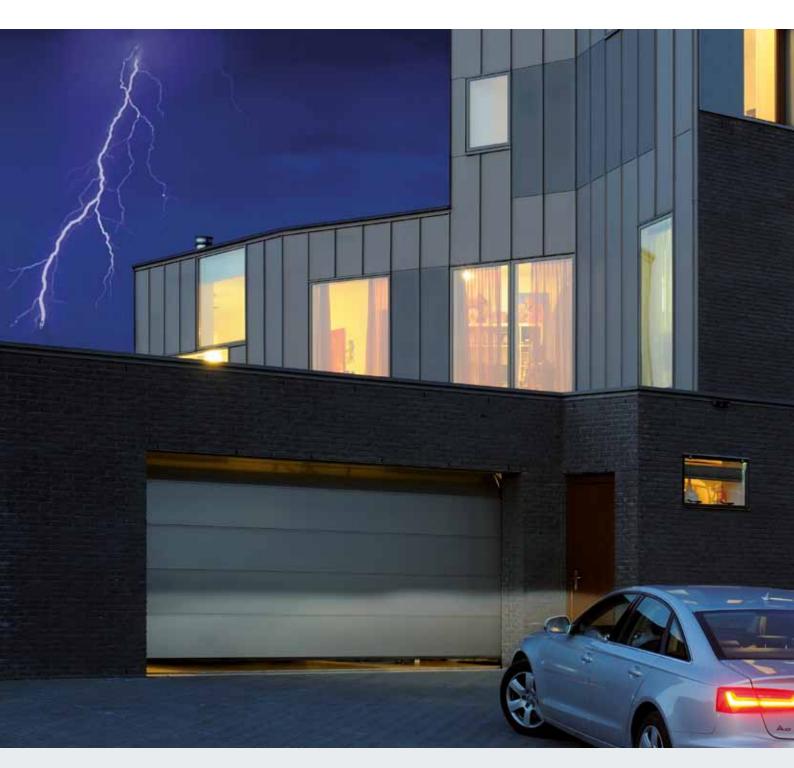

Hörmann products are always a bit more sophisticated. Many useful details make it easier to operate your door with increased security. Photocells effectively secure your garage door or gate, families with children especially appreciate this level of safety. Thanks to the emergency battery, you can reliably open your door even after a power failure.



# **Emergency battery HNA** for garage door operators

With this emergency power supply, you can bypass network power failures for up to 18 hours and max. 5 door cycles. The emergency battery recharges itself during normal operation. Emergency batteries can be added to all current Hörmann garage door operators.



# **Emergency battery HNA Outdoor for entrance gate operators**

The RotaMatic hinged gate operator and LineaMatic sliding gate operators can also be equipped with an emergency power supply to bridge power failures. They can be universally fitted to the wall or floor.



#### Additional emergency release

For garages without a second entrance, we offer you the following options to open the door from the outside in case of emergency (e.g. power failure):

#### Sectional doors without a handle

Choose between the emergency release lock with round cylinder (cannot be integrated in the home locking system) and the emergency release handle in 8 variations including lock (can be integrated in the home locking system).

**Up-and-over doors and sectional doors with a handle** Emergency release (not shown)





#### **Photocell**


Hörmann's reliable one-way photocell systems immediately stop the gate if the light beam is interrupted. They can be directly fitted to the door or integrated in STL key switch posts.

#### Signal lamp

A warning light on your entrance gate provides you with extra security, day and night.

# **Light and safety accessories**

Technology for garage doors and gates

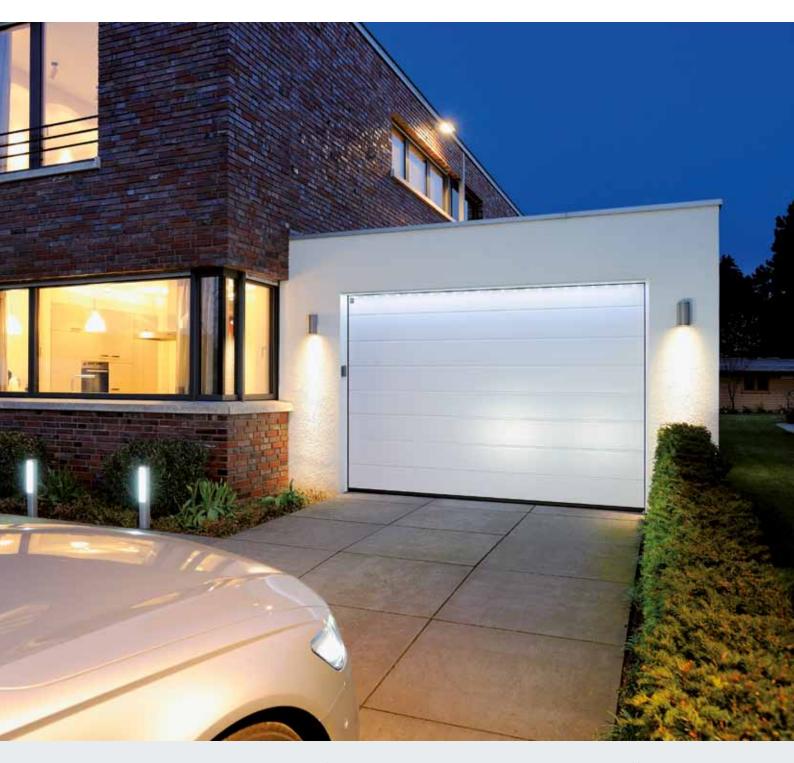

Hörmann key switch post sets made of weather-resistant, anodised aluminium offer you more light and security. The posts can be individually equipped using variable inserts for photocells and LED light modules.

# Ensure a bright, safe entrance area



### Light key switch post SLS

The light key switch post SLS with an LED light module is available in heights of 550 mm and 1080 mm. The 1080 mm key switch post is also available with two LED light modules to improve the lighting in your entrance area.

#### SLS-K

with LED light module Height 550 mm

#### SLS-L

with double LED module Height 1080 mm

#### SLS-L

with LED light module and design screen Height 1080 mm

Energy efficiency class A



### **LED** light modules

You can choose between a warm or neutral white light in the light modules. The optional aluminium design screen creates a special accent.



### Safety key switch post STL

The 550-mm-high basic version is equipped with a photocell holder. The key switch posts can be optionally supplied with two photocells or a photocell and LED light module.

#### STL

with optional photocell

#### STL

with two optional photocells

#### STL

with optional photocell and LED light module



### **LED** lighting for doors

An LED light strip with neutral white light puts your door and side door in the right light. The plug-in system can be shortened individually, making it a perfect fit for any door width. You can arrange the LED light strip at the lintel (figure above) or bottom edge of the door leaf.

LED distance: 125 mm

Energy efficiency class A


## SupraMatic, ProMatic

● = Standard ○ = Optional with hand transmitter HS 5 BS

		♦ BiSecur	♦ BiSecur	♦ BiSecur	
		SupraMatic E	SupraMatic P	ProMatic	ProMatic Akku
Product description					
No. of parking spaces		● / max. 12	● / max. 25	●/max. 6	● / max. 2
Door cycles (Open / Ci	lose) per day	Max. 25	Max. 50	Max. 12	Max. 4
Suitable for:	Commercial areas	_	-	_	-
	Doors with wicket doors / timber doors	-/•	•*/•	<ul> <li>-/ ●</li> <li>Timber doors with max. 3.5 m door width and 9 m² door leaf surface</li> </ul>	-/-
	Max. door width	5500	6000 **	5000	3000
	Max. door leaf surface	13.75 m²	15.00 m²	11 m²	8 m²
Operator data	Motor		24 V DC	gear drive	
	Mains voltage	230 V – 2	240 V AC	230 V – 240 V AC	See the technical
	Power input	0.2	kW	0.2 kW	manual
	Pull and push force	650 N	750 N	600 N	350 N
	Peak force	800 N	1000 N	750 N	400 N
	Opening speed	Approx. 22 cm/s	Approx. 22 cm/s	Approx. 14 cm/s	Approx. 13 cm/s
	Standby	< 1 watt	<1 watt	< 7 watts	< 0.1 watt
	Housing		and plastic, eel base plate	Plastic, galvanize	d steel base plate
	Temperature range		–20 °C to +60 °C		-15 °C to +45 °C
	Protection category	Only for dry rooms			
Control electronics	Impulse control	•	•	•	•
	Power limit	•	•	•	•
	Adjustable soft start and soft stop	•	•	•	•
	Display	Double 7-seg	ment display	LED	LED
	Adjustable operator light and partial opening	•	•	-/●	-
	Adjustable automatic timer	•	•	•	-
	Hold-open phase after activation	30 – 180 sec.	30 – 180 sec.	30 sec.	-
Equipment	Hand transmitter (868 MHz)	5-button hand transmitter HS 5 BS (black textured surface)  2-button hand transmitter HS 5 BS (black textured with plastic cap		textured surface	
	Integrated receiver (868 MHz)	Bi-directional 3-channel receiver BS		Bi-dire 2-channel	ctional receiver BS
	Querying the door position			0	-
	Control buttons	Next to the display Contro		Control buttons in the operator cover	
	Photocell	_	●/EL 101	_	-
	High-speed opening	•	•	_	-
	Quick release operated from inside	•	•	•	•
	Connecting lead with Euro plug	•	•	•	-
	Adjustable, integrated garage light / pre-set	●/1 r	minute	● / with 2-minute light	● /with 30 s light
	Anti-lift kit for break-in resistance	•	•	•	•
	Universal installation bracket for up-and- over doors and sectional doors!	•	•	•	•


<sup>\*</sup> A photocell is required for doors with wicket doors.

 $<sup>^{\</sup>star\star}$  >5500 mm only in conjunction with an FS 60 operator boom and fitting

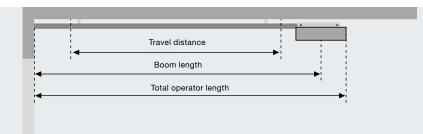


Туре	e of boom	Overall length	Boom length	Travel distance
ß	Short boom	3200	2975	2475
<b>Ø</b>	Medium boom	3450	3225	2725
0	Long boom	4125	3900	3400
Воо	m applications for Hörmann garage doors			Height
Up-and-over garage doors (N 80 and DF 98) Sectional garage doors with track application N Sectional garage doors with track application Z, L, H			Up to 2500 Up to 2250 Up to 2125	
Up-and-over garage doors (N 80 and DF 98)  Sectional garage doors with track application N Sectional garage doors with track application Z, L, H			Up to 2750 Up to 2500 Up to 2375	
Sectional garage doors with track application N, Z, L, H			Up to 3000	

### Note the travel distance for doors from other manufacturers!



## [1] Required clearance for up-and-over garage doors

N 80	0
N 80, style 905, style 941 or with timber infill	15
DF 98, DF 95, DF 80	65




### [2] Required clearance for sectional garage doors with torsion spring assembly

With track application N Ceiling height = grid height + 210	0
With track application H	0

# [3] Required clearance for sectional garage doors with torsion spring assembly

With track application L	15
Ceiling height = grid height + 115	



#### [4] Required clearance for sectional garage doors with tension spring assembly

## Clearance for doors from other manufacturers

Between the highest point of door travel and the ceiling	30
or door traver and the centrig	

## Hinged gate operators RotaMatic


### ● = Standard

		⇔BiSecur	⇔BiSecur	⇔BiSecur	
		RotaMatic	RotaMatic P	RotaMatic PL	RotaMatic Akku
Product description					
No. of parking spaces		●/max. 6	●/max. 12	●/max. 12	● / max. 2
Door cycles (Open / Clo	ose) per day	Max. 12	Max. 25	Max. 25	Max. 5
Suitable for:	Commercial areas	-	•	•	-
	Up to max. door height	2000 mm	2000 mm	2000 mm	2000 mm
	Max. leaf width	1000 – 2500 mm	1000 – 2500 mm	1500 – 4000 mm	1000 – 2500 mm
	Up to max. door leaf weight	220 kg	400 kg	400 kg	120 kg
Operator data	Motor		24 V DC	gear drive	
	Mains voltage	23	80 V – 240 V AC, 50	Hz	See the technical manual
	Pull and push force	2000 N	2500 N	2500 N	1000 N
	Peak force	2200 N	2700 N	2700 N	1100 N
	Standby		< 7 watts		< 0.1 watt
	Housing	Aluminium / weather- resistant, glass- fibre reinforced plastic.	Aluminium / zinc diecast / weather- resistant, glass- fibre reinforced plastic	Aluminium / zinc diecast / weather- resistant, glass- fibre reinforced plastic	Aluminium / weather- resistant, glass- fibre reinforced plastic.
	Temperature range		-20 °C to +60 °C		-15 °C to +45 °C
	Protection category		IP	44	
Control electronics	Protection category (separate control housing)	IP 65	IP 65	IP 65	IP 65
	Impulse control	•	•	•	•
	Power limit	•	•	•	•
	Soft start and soft stop	•	•	•	•
	Adjustable automatic timer	•	•	•	•
	Number of connectable safety devices	2	2	2	1
End-of-travel position	Closed	Can be	set with an integrat	ed limit switch or e	nd stop.
	Open	F	rogrammable (i.e. r	o end stop required	d!)
Equipment	Hand transmitter (868 MHz)	5-button hand transmitter HS 5 BS (black textured surface)		2-button hand transmitter HSE 2 BS (black textured surface with plastic caps)	
	Receiver (868 MHz)	Bi-directional 5-channel receiver ESE BS			Fixed code receiver for the impulse and partial opening functions
	Querying the door position		•		-
Mains connecting lead		230 V, NYY 3 × 1.5	5 mm² (on-site)		
Motor cable		Connecting lead up to 10 m NYY 5 x 1.5 mm² (on-site)			
Additional connection of	cable	All cables underground NYY, e. g. 5 × 1.5 mm <sup>2</sup>			
Electric lock connecting lead		NYY 3 × 1.5 mm² (on-site) underground H07RN-F 2 × 1 mm² on the door leaf			
Lay all cables separate	ly!				



## For Hörmann sales partners The planning program for hinged gate operators


With the planning program, Hörmann supports you in planning and fitting your hinged gate operator.

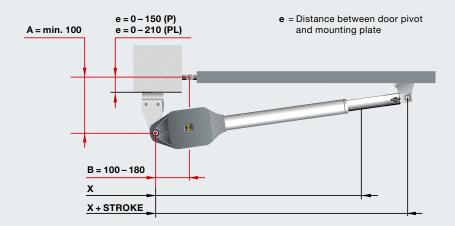



### **RotaMatic**

Dimensions	x	x + stroke
RotaMatic / RotaMatic P	720	1120
RotaMatic PL	820	1320

To ensure optimum door travel, the maximum difference between the A dimension and the B dimension must be 40 mm.

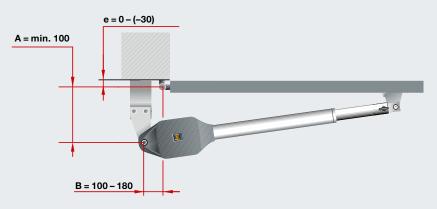

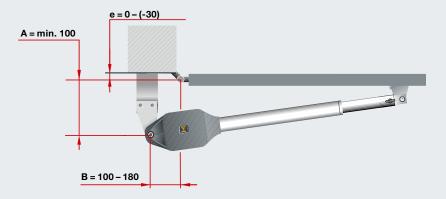

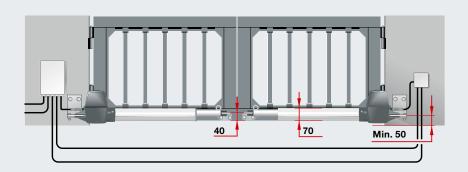


All illustrations and information with standard tracks, additional equipment features possible.

## DTH 700, DTU 250 hinged gate operators

### ● = Standard


		DTH 700	DTU 250		
Product description					
No. of parking spaces		● / max. 12	● / max. 12		
Door cycles (open/clos	se) per day	Max. 25	Max. 25		
Suitable for:	Commercial areas	•	-		
	Up to max. door height	2500 mm	2500 mm		
	Max. leaf width	7000 mm	2500 mm		
	Up to max. door leaf weight	1000 kg	500 kg		
Max. opening angle	Standard	_	110°		
	With special fitting set	-	140°		
Additional information		An electric lock and end stops are required!	An electric lock is required for doors with partial infill!		
Operator data	Motor	Electro-hydraulic	Electromechanical		
	Mains voltage	230 V – 240	V AC, 50 Hz		
	Pull and push force	3000 N	2500 N		
	Peak force	3500 N	3000 N		
	Standby	< 10 watts	< 10 watts		
	Housing	Weather-resistant aluminium housing	Weather-resistant steel trough with stainless steel cover plate		
Temperature range Protection category		-20 °C to +60 °C			
		IP 55	IP 67		
Control electronics	Protection category (separate control housing)	IP 55	IP 67		
	Display	● / two 7-segment displays	● / two 7-segment displays		
	Power limit (adjustable)	•	•		
	Soft stop (adjustable)	•	•		
	Adjustable automatic timer	•	•		
Equipment	Hand transmitter (868 MHz)	Without ror	Without remote control		
	Receiver (868 MHz)	Without rei	note control		
Mains connecting lead	ı	230 V, NYY 3 × 1.5 mm² (on-site)	230 V, NYY 3 × 1.5 mm² (on-site)		
Motor cable		230 V, NYY 5 × 1.5 mm² (on-site)	230 V, NYY 5 × 1.5 mm² (on-site)		
Additional connection cable		All cables underground NYY, e. g. 5 × 1.5 mm <sup>2</sup>	All cables underground NYY, e. g. 5 × 1.5 mm <sup>2</sup>		
Electric lock connection	ng lead	NYY 3 × 1.5 mm² underground H07RN-F 2 × 1 mm² on the door leaf	NYY 3 × 1.5 mm² underground H07RN-F 2 × 1 mm² on the door leaf		
Lay all cables separate	elv!				

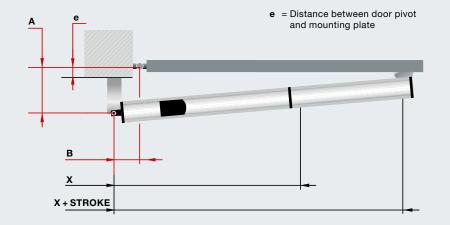


### **DTH 700**

Opening angle	A	В	е
90°	130	130	80
115°	100	120	50
125°	90	120	40

Dimensions	х	x + stroke
	700	960

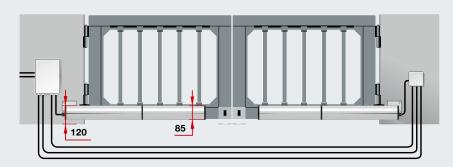


**Note:** In order to comply with the requirements in DIN EN 13241, we recommend using a closing edge safety device.

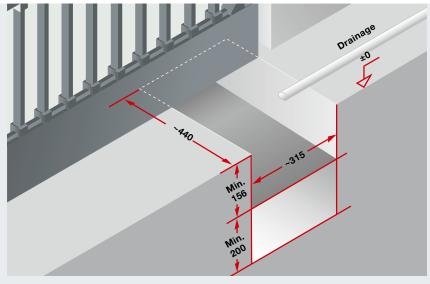

### **DTU 250**

Foundation dimensions Approx.  $315 \times 440 \times 200$ 

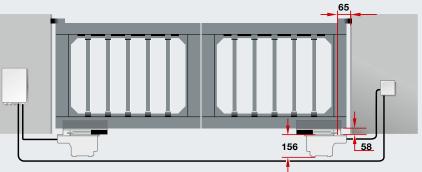


**Note:** In order to comply with the requirements in DIN EN 13241, we recommend using a closing edge safety device.


## Sliding gate operators LineaMatic, STA 400


### ● = Standard

			♦⇒BiSecur	♦BiSecur		
			LineaMatic	LineaMatic P	LineaMatic H	STA 400
Product description						
No. of parking spaces		●/max. 6	● / max. 12	● / max. 12	● / > 25	
Door cycles (Open / Close) per day		Max. 12	Max. 25	Max. 25	Max. 50	
Suitable for:	Commercial areas		-	-	•	•
	Up to max. door height		2000 mm	2000 mm	2000 mm	3000 mm
	Max. door width		6000 mm	8000 mm	10000 m	17000 m
	Max. door weight:	For bottom-guided doors	300 kg	500 kg	800 kg	2500 kg
		For self-supporting doors	250 kg	400 kg	600 kg	1800 kg
Operator data	Motor		24 V DC gear drive			1-phase current gear drive
	Mains voltage		230 V – 240 V AC			
	Pull and push force		650 N	1000 N	1200 N	2000 N
	Peak force		800 N	1200 N	1400 N	2300 N
	Standby			< 7 watts		< 7 watts
	Housing		Zinc diecast / weather-resistant plastic			Weather-resistant
	Temperature range		-20 °C to +60 °C			-20 °C to +60 °C
	Protection category		IP 44			IP 65
Control electronics	Control integrated in the housing		•	•	•	•
	Power limit (adjustable)		•	•	•	•
	Soft start and soft stop (adjustable)		•	•	•	•
	Magnetic limit switch		•	•	•	
	Electronic door position sensor					•
	Integrated automatic timer		•	•	•	•
	Passage of pedestria	ns programmable	•	•	•	•
	Number of connectal	ole safety devices	3	3	3	3
Equipment	Hand transmitter (868 MHz)		5-button hand transmitter HS 5 BS (black textured surface) Without re		mote controll	
	Receiver (868 MHz)		Bi-directional 5-channel receiver ESE BS			
	Querying the door position		•		-	-
	Photocell (only for version SK)		One-way photocell EL 301			
	Warning light (only for version SK)		LED warning light SLK, yellow For floor and wall fitting			-
Mains connecting lead		230 V, NYY 3 × 1.5 mm² (on-site)			230 V, NYY 3×1.5 mm² (on-site	
Additional connection cable			All cables underground NYY, e. g. 5 x 1.5 mm <sup>2</sup>			All cables underground NYY, e. g. 5 x 1.5 mm <sup>2</sup>
Foundation dimensions			Min. 440 × 300 × 800 mm (frost resistant)			710×410×800 mm (frost resistant)
Connecting lead			See the figure for position of tube			
Lay all cables separat	elvi					

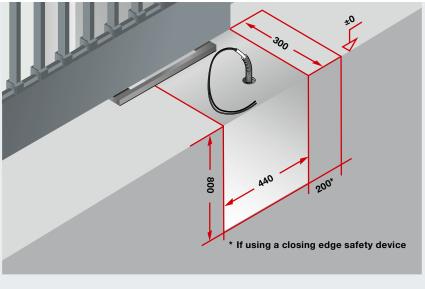


### LineaMatic

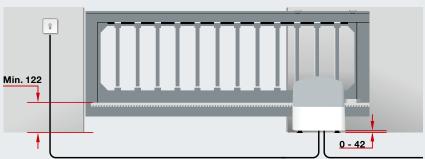

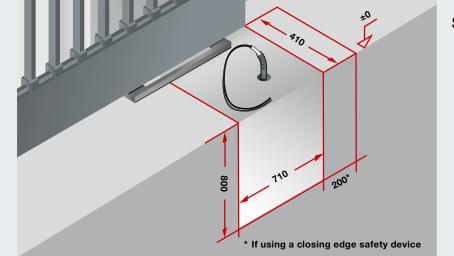

## **STA 400**

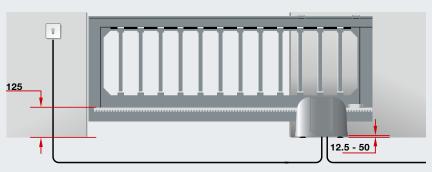

**Note:** In order to comply with the requirements in DIN EN 13241, we recommend using a closing edge safety device.



## **Experience Hörmann quality**

For every application involving new construction and modernisation

Hörmann provides an excellent basis for comprehensive planning. Carefully matched solutions offer you the very best in perfectly designed products for every area.

### **Garage doors**

Optimally match your personal architectural style: up-and-over or sectional doors made of steel or timber.

### **Door operators**

Enjoy extra convenience and break-in-resistant security: Hörmann operators for garage doors and entrance gates.

### **Entrance doors**

Our comprehensive entrance door ranges include models that fit almost every need and requirement.

#### Steel doors

Sturdy doors for your entire home, from basement to roof.

### **Frames**


Choose from our comprehensive range of products for new construction, expansion and modernisation.



Garage doors and entrance gate operators



ThermoPro entrance door

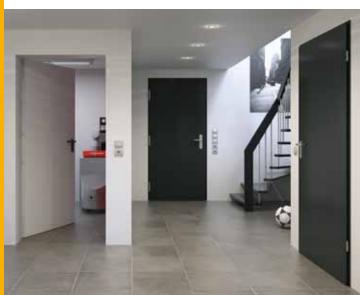

Steel doors

### Hörmann: Quality without Compromise



Hörmann is the only manufacturer worldwide that offers you a complete range of all major building products from one source. We manufacture in highly-specialised factories using the latest production technologies. The close-meshed network of sales and service companies throughout Europe, and activities in the USA and China, make Hörmann your strong partner for first-class building products, offering "Quality without Compromise".

GARAGE DOORS
OPERATORS
INDUSTRIAL DOORS
LOADING EQUIPMENT
HINGED DOORS
DOOR FRAMES

